

FIG. 2

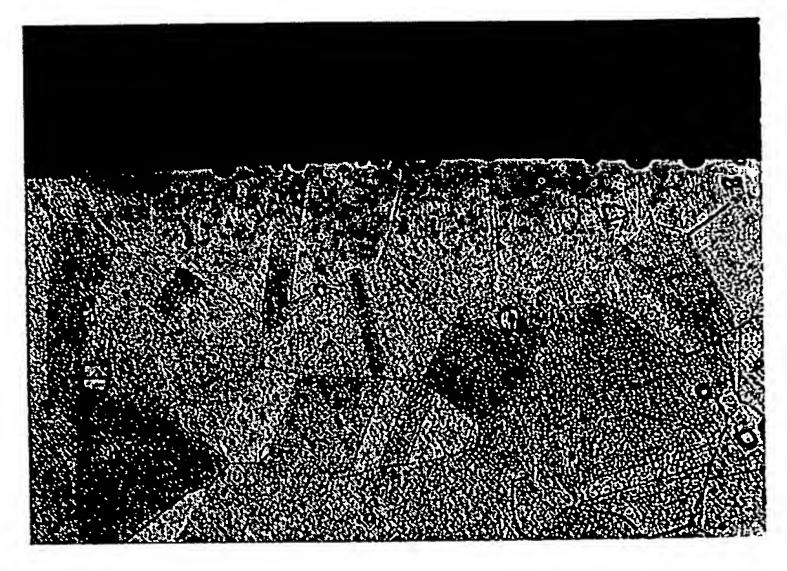
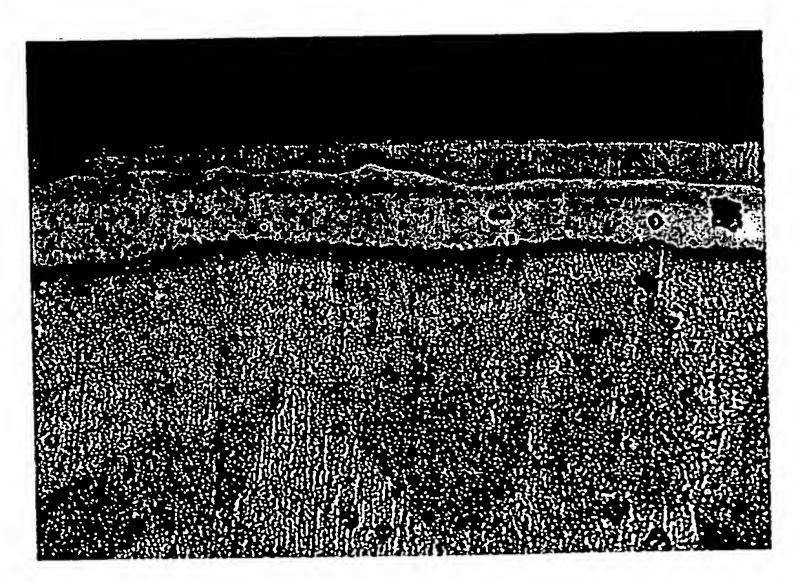


FIG. 3



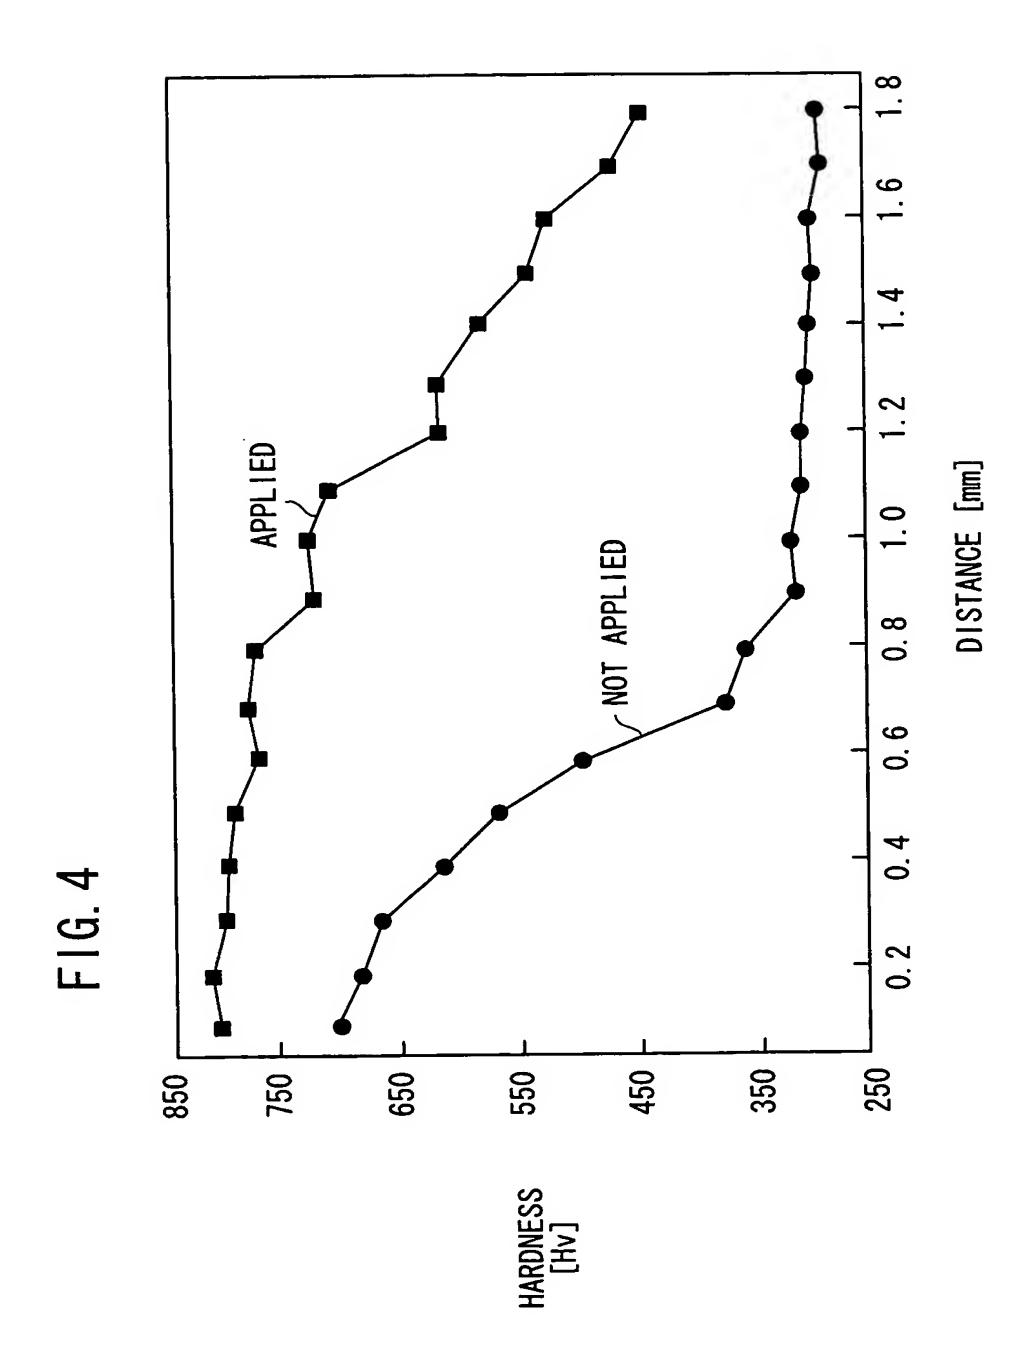


FIG. 5

	MEMBER	MATERIAL	THICKNESS OF COMPOUND LAYER OR NITRIDE LAYER (TIMES)	SURFACE HARDNESS (TIMES)	DEPTH OF DIFFUSION LAYER (TIMES)
GAS NITROCARBURIZING (600°C × 2hr)	CRANK SHAFT	S40C	1. 6	1. 2	1. 4
	ENGINE VALVE	NCF3015	7. 5	1. 6	
		NCF6018	5	1. 9	-
		NCF440	2	1.6	_
		SKH51	1. 1	1. 1	
		SUH11	2	1. 2	_